

**IN THE ABSTRACT**


Please substitute the attached Abstract of the Disclosure for the abstract as originally as filed.

**REMARKS**

The above amendments are being made to place the application in better condition for examination.

Entry of the amendment is respectfully solicited.

Respectfully submitted,

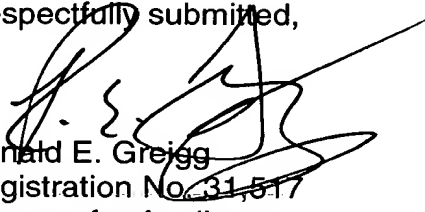

Ronald E. Greigg  
Registration No. 31,517  
Attorney for Applicant  
Customer No. 002119

Greigg & Greigg P.L.L.C.  
1423 Powhatan Street, Unit One  
Alexandria, Virginia 22314  
Telephone: (703) 838-5500  
Facsimile: (703) 838-5554

Appendix 1, changes to the specification indicated with brackets and underlining:

**Page 1, of th specification:**

**FUEL INJECTION DEVICE WITH MAGNET VALVE DAMPED  
IN BOTH LAMINAR AND TURBULENT FASHION**

**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application is a 35 USC 371 application of PCT/DE 00/04587 filed on  
December 22, 2000.

**BACKGROUND OF THE INVENTION**

[Prior Art]

Field of the Invention

The invention is based on a fuel injection device, having a magnet valve for controlling fuel flows, which valve, in at least one of its positions, closes a damping chamber in the magnet valve that communicates constantly with a relief chamber via a damping throttle.

**DESCRIPTION OF THE PRIOR ART**

[In this] A fuel injection device[,] of the type with this invention is concerned is known from Published, Nonexamined German Patent Application DE-OS 196 16 084 A1, employs an insert piece with a through bore acting as a damping throttle between the damping chamber and the relief chamber. The damping performance of this through bore is not always satisfactory. Moreover, the installation space required for the insert piece is comparatively great.

## OBJECTS AND SUMMARY OF THE INVENTION

The primary object of the invention is to furnish a fuel injection device with further improved performance.

According to the invention, this object is attained with a fuel injection device, having a magnet valve for controlling fuel flows, which valve, in at least one of its positions, closes a damping chamber in the magnet valve that communicates constantly with a relief chamber via a damping throttle, and

### **Page 2, of the specification:**

in which the damping throttle throttles in both laminar fashion and turbulent fashion.

[Advantages of the Invention:] SUMMARY OF THE INVENTION

### **Page 4, of the specification:**

result of these designs, especially good damping performance of the laminar throttle and the damping throttle overall can be attained. The use of a round indentation, with a depth of 0.1 to 0.2 mm and disposed substantially concentrically to the through bore has proved to be especially advantageous.

In a further feature of the invention, the indentation is disposed in such a way that it intersects at least one recess in the support plate, so that a communication

always exists from the damping chamber to the relief chamber, via the gap formed by the indentation and the electromagnet and via the recess.

In a further feature of the invention, the support plate is mounted detachably in the fuel injection device, so that by simply replacing the support plate, the damping performance of the fuel injection device can be changed and improved.

### BRIEF DESCRIPTION OF THE DRAWINGS

Further advantages and advantageous features of the invention can be learned from the ensuing [drawing,] description, [and claims.] taken with the drawings, in which:

[Drawing]

[Exemplary embodiments of the subject of the invention are shown in the drawing and explained in further detail in the ensuing description. Shown are:]

#### **Page 5, of the specification:**

Fig. 1[:] is a cross section through a fuel injection device of the invention;

Fig. 2[:] is an enlarged view of the detail X of Fig. 1;

Figs. 3[:]a, 3b and 3c are a cross section and two views from below of a support plate; and

Figs. [4: a cross section and] 4a and 4b are two further views from below of a support plate.

[Description of the Exemplary Embodiments] DESCRIPTION OF THE PREFERRED EMBODIMENTS

**Page 6, of the specification:**

A magnet disk 18 and a shim 19 are screwed onto this face 10. The shim 19 has a keyhole-shaped recess 20. A neck 22 of a valve member 23 of a magnet valve 24 protrudes through a narrow portion of the recess 20 that is coaxial to the distributor. The magnet valve is inserted with its housing 25 into the housing 1 of the fuel injection pump and is fixed there in stationary fashion. In its housing 25, the magnet valve 24 has an electromagnet 29 with a magnet coil 26, which is disposed inside a magnet core 27, which takes the form of a ring-shaped cup, with a middle, sleeve-like magnet core 27 and an outer magnet jacket 28, between which and the middle magnet core 27 the magnet coil 26 is supported. On the face end toward the distributor 7, the magnet core 27 is supplemented with the magnet disk 18, which is adapted in diameter to the inside diameter of the outer magnet jacket 28 and with the latter forms only a narrow air gap. As a result, while the electromagnet 29 is stationary, the magnet disk 18, which is part of the magnetic circuit, can rotate together with the rotating distributor 7.

**Page 10, of th specification:**

are circular, which has proved to be especially advantageous. The countersunk recess 47 is shown in Fig. 4b.

With the fuel injection device described above and the associated magnet valve, an exact fuel quantity control is obtained, in particular in the case contemplated here in which, with the aid of the magnet valve, the high-pressure pumping phase along with the injection onset and injection duration of the fuel injection pump is determined. Via the rotating distributor, and via a respective supply line 43, the associated fuel injection valve is triggered and supplied with the high-pressure injection quantity controlled by the magnet valve 24. With only slight mass, the magnet valve is very fast and vibration-free, with the optimally adaptable damping contemplated here.

[All the characteristics shown and described in the description, the following claims and the drawing can be essential to the invention both individually and in arbitrary combination with one another.]

The foregoing relates to preferred exemplary embodiment of the invention, it being understood that other variants and embodiments thereof are possible within the spirit and scope of the invention, the latter being defined by the appended claims.

**Page 13, abstract of the disclosure:**

**Abstract of the Disclosure**

A fuel injection device for internal combustion engines [is proposed,] having a magnet valve [(24)] that has a damping chamber [(40)] and a relief chamber [(41),] which communicate hydraulically through a damping throttle [(39, 51)] that damps in both laminar and turbulent fashion. As a result, the waviness of the characteristic curves of the fuel injection system is reduced and its function is improved.

[(Fig. 2)]